Bonded / Dowty Seal with installation diagram	Bonded / Dowty Self-Centering Seal with installation diagram
	
» Bonded / Dowty Seal can be used to seal clearance or tapped holes in general engineering using a wide range of different bolts » Can be used on flat flanges or with recessed bolt holes	» Concentrically located » Positively retained » Ability to pre-assemble » Ease of assembly » All European thread sizes available

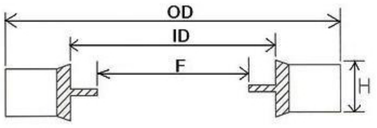

THREAD DIA. 'M'	ID	OD	H	F
	±0.10	+0.13/-0	±0.10	±0.20
M10	10.70	16.08	1.5	8.05
1/8 BSP	10.37	15.88	2.0	8.56
	10.37	15.88	2.0	8.26
1/4 BSP	13.74	20.57	2.0	11.45
	13.74	20.57	2.0	11.18
3/8 BSP	17.28	23.80	2.0	14.96
	17.28	23.80	2.0	14.76
1/2 BSP	21.54	28.58	2.5	18.64
	21.54	28.58	2.5	18.24
5/8 BSP	23.49	31.75	2.5	20.27
3/4 BSP	27.05	34.93	2.5	24.13
	27.05	34.93	2.5	23.83
7/8 BSP	30.81	38.10	2.5	27.51
1 BSP	33.89	42.80	2.5	29.92
	33.89	42.80	3.2	29.92
1 1/4 BSP	42.93	52.38	2.5	38.45
	42.93	52.38	3.2	38.45
1 1/2 BSP	48.44	58.60	2.5	44.45
	48.44	58.60	3.2	44.45
1 3/4 BSP	54.89	69.85	3.2	50.42
2 BSP	60.58	73.03	2.5	56.26
	60.58	73.03	3.2	56.26
2 1/4 BSP	66.68	79.50	3.2	62.36
2 1/2 BSP	76.08	90.17	3.2	71.50
M6	6.70	11.00	1.0	4.70
M8	8.70	14.00	1.0	6.40
M12	12.70	19.00	1.5	9.73
M14	14.70	22.00	1.5	11.38
5/8	16.51	25.40	2.0	12.90
M16	16.70	24.00	1.5	13.41
11/16	18.16	25.40	2.5	14.50
M18	18.70	26.00	1.5	14.76
M20	20.70	28.00	1.5	16.76
M22	22.70	30.00	2.0	18.74
M24	24.70	32.00	2.0	20.11
M5	5.70	9.00	1.0	4.50
M5	5.70	10.00	1.0	4.50
M6	6.70	10.00	1.0	4.70
M6	6.70	11.00	1.0	4.70
M8	8.70	13.00	1.0	6.40
M8	8.70	14.00	1.0	6.40
M10	10.70	16.00	1.5	8.05
M10	10.70	18.00	1.5	8.05
M12	12.70	18.00	1.5	9.73
M12	12.70	20.00	1.5	9.73
M14	14.70	22.00	1.5	11.38
M16	16.70	24.00	1.5	13.41
M18	18.70	26.00	1.5	14.76
M20	20.70	28.00	1.5	16.76
M22	22.70	30.00	2.0	18.74
M24	24.70	32.00	2.0	20.11
M26	26.70	35.00	2.0	22.30
M27	27.20	36.00	2.0	23.30
M30	31.00	39.00	2.0	25.70
M32	32.70	40.00	2.0	31.80
M33	33.70	42.00	2.0	28.70
M36	36.70	46.00	2.0	31.10
M42	42.70	53.00	2.0	36.50